
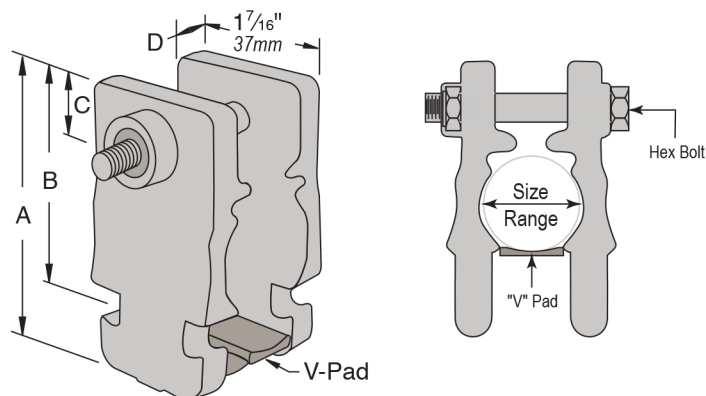


## Cush-A-Grip

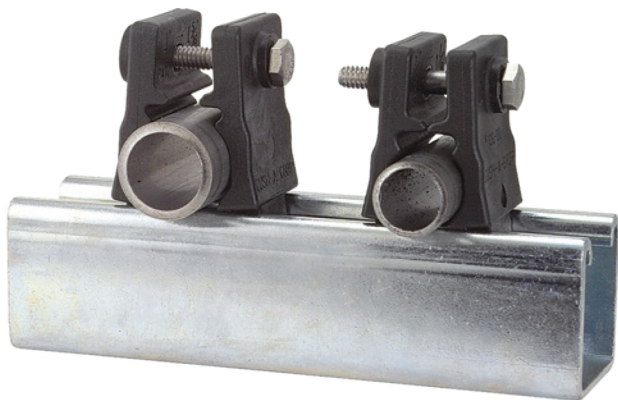

## FEATURES

- Ten sizes of tube, five sizes of pipe
- Diameters from .25" to 1.31"

## ADVANTAGES

- Reduces inventory SKU's
- Simplifies take-offs and requirements on projects using both tube and pipe sizes
- Easy installation, Non conducting
- Permissible outdoors
- Temp. range: -40°F to +380°F (-40°C to 193°C)
- No galvanic reaction, Will not rust

## BENEFITS

- Lowers overall inventory costs
- Works with screw or nut driver
- Resists vibration
- Use in place of steel clamps with steel tube
- Multi-environmental
- Covers a wide range of applications and maintains thermal barrier
- For use on copper tube
- Use in place of stainless, aluminum, PVC or hot dipped galvanized clamps



| Part No. | O.D. Tube Sizes |        |        | Pipe Sizes  | Metric Sizes | Diameters (in) |
|----------|-----------------|--------|--------|-------------|--------------|----------------|
| DSACG-10 | 1/4"            | 3/8"   | 1/2"   | 1/4"        | 6mm – 14mm   | 0.25 – 0.54    |
| DSACG-20 | 5/8"            | 3/4"   | 7/8"   | 3/8" – 1/2" | 15mm – 22mm  | 0.62 – 0.87    |
| DSACG-30 | 7/8"            | 1"     | 1-1/8" | 3/4"        | 22mm – 28mm  | 0.87 – 1.12    |
| DSACG-40 | 1"              | 1-1/8" | 1-1/4" | 3/4" – 1"   | 26mm – 32mm  | 1.00 – 1.31    |

| Part No. | Nominal Pipe Size | Dimensions         |                    |                 |                | Hex Head Cap Screw & Lock Nut |
|----------|-------------------|--------------------|--------------------|-----------------|----------------|-------------------------------|
|          |                   | "A"                | "B"                | "C"             | "D"            |                               |
| DSACG-10 | 1/4"              | 1-15/16"<br>(49mm) | 1-3/8"<br>(35mm)   | 3/8"<br>(10mm)  | 3/16"<br>(5mm) | 1/4"-20 x 1-1/2"              |
| DSACG-20 | 3/8"              | 2-3/8"<br>(60mm)   | 1-5/8"<br>(41mm)   | 7/16"<br>(11mm) | 1/4"<br>(6mm)  | 1/4"-20 x 2"                  |
| DSACG-30 | 1/2"              | 2-9/16"<br>(65mm)  | 1-13/16"<br>(46mm) | 7/16"<br>(11mm) | 5/16"<br>(8mm) | 1/4"-20 x 2"                  |
| DSACG-40 | 3/4"              | 2-11/16"<br>(68mm) | 1-15/16"<br>(49mm) | 7/16"<br>(11mm) | 5/16"<br>(8mm) | 1/4"-20 x 2"                  |

### PROJECT INFORMATION:

### APPROVAL STAMP:

Project:

Date:

Phone:

Architect / Engineer:

Contractor:

Address:

Notes 1: