




The hinged cushion allows easy installation of the wire, but the components will not get separated and lost or broken.

Replaces Porcelain and Maple Cable Clamp. Assembly consists of thermoplastic elastomer cushion with plated or stainless steel clamp. Plated steel and stainless are both supplied with Silicon Bronze bolt and nut.

- Non-breakable material
- Chemical and UV resistant
- **U.L. Listed** - Burning stops within 10 seconds after two applications of ten seconds each of a flame to a test bar with no flaming drips.
- Plated Steel, or Stainless steel clamps
- Tapered flange to protect cable
- Dielectric strength 640 volts per mil
- One piece cushion design, available with Flame retardant / Halogen Free cushions
- Silicon Bronze Hardware used to Breakup the Magnetic field around the Cable at the Clamping Location.

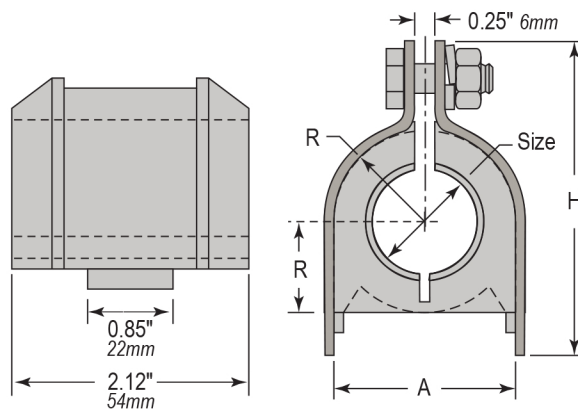

PROJECT INFORMATION:

APPROVAL STAMP:

Project:

Date:

Phone:


Architect / Engineer:

Contractor:

Address:

Notes 1:

Part No.	Dimensions (Inches)			Total Assy. Height - H
	Hole Dia.	A	R	
DSA006CC018	3/8"	1.12" (28mm)	0.56" (14mm)	1.82" (46mm)
DSA008CC018	1/2"	1.12" (28mm)	0.56" (14mm)	1.82" (46mm)
DSA010CC018	5/8"	1.12" (28mm)	0.56" (14mm)	1.82" (46mm)
DSA012CC026	3/4"	1.62" (41mm)	0.81" (21mm)	2.34" (59mm)
DSA014CC026	7/8"	1.62" (41mm)	0.81" (21mm)	2.34" (59mm)
DSA016CC026	1"	1.62" (41mm)	0.81" (21mm)	2.34" (59mm)
DSA018CC026	1-1/8"	1.62" (41mm)	0.81" (21mm)	2.34" (59mm)
DSA020CC034	1-1/4"	2.12" (54mm)	1.06" (27mm)	2.86" (73mm)
DSA022CC034	1-3/8"	2.12" (54mm)	1.06" (27mm)	2.86" (73mm)
DSA024CC034	1-1/2"	2.12" (54mm)	1.06" (27mm)	2.86" (73mm)
DSA026CC034	1-5/8"	2.12" (54mm)	1.06" (27mm)	2.86" (73mm)
DSA028CC042	1-3/4"	2.62" (67mm)	1.31" (33mm)	3.50" (89mm)
DSA030CC042	1-7/8"	2.62" (67mm)	1.31" (33mm)	3.50" (89mm)
DSA032CC042	2"	2.62" (67mm)	1.31" (33mm)	3.50" (89mm)
DSA034CC042	2-1/8"	2.62" (67mm)	1.31" (33mm)	3.50" (89mm)
DSA036CC050	2-1/4"	3.12" (79mm)	1.56" (40mm)	4.05" (103mm)
DSA038CC050	2-3/8"	3.12" (79mm)	1.56" (40mm)	4.05" (103mm)
DSA040CC050	2-1/2"	3.12" (79mm)	1.56" (40mm)	4.05" (103mm)
DSA042CC050	2-5/8"	3.12" (79mm)	1.56" (40mm)	4.05" (103mm)
DSA044CC058	2-3/4"	3.62" (92mm)	1.81" (46mm)	4.75" (121mm)
DSA046CC058	2-7/8"	3.62" (92mm)	1.81" (46mm)	4.75" (121mm)
DSA048CC058	3"	3.62" (92mm)	1.81" (46mm)	4.75" (121mm)
DSA050CC058	3-1/8"	3.62" (92mm)	1.81" (46mm)	4.75" (121mm)
DSA052CC066	3-1/4"	4.12" (105mm)	2.06" (52mm)	5.125" (130mm)
DSA054CC066	3-3/8"	4.12" (105mm)	2.06" (52mm)	5.125" (130mm)
DSA056CC066	3-1/2"	4.12" (105mm)	2.06" (52mm)	5.125" (130mm)
DSA058CC066	3-5/8"	4.12" (105mm)	2.06" (52mm)	5.125" (130mm)
DSA060CC074	3-3/4"	4.62" (117mm)	2.31" (59mm)	5.54" (141mm)
DSA062CC074	3-7/8"	4.62" (117mm)	2.31" (59mm)	5.54" (141mm)
DSA064CC074	4"	4.62" (117mm)	2.31" (59mm)	5.54" (141mm)
DSA066CC074	4-1/8"	4.62" (117mm)	2.31" (59mm)	5.54" (141mm)
DSA068CC080	4-1/4"	5.00" (127mm)	2.50" (64mm)	5.92" (150mm)
DSA070CC080	4-3/8"	5.00" (127mm)	2.50" (64mm)	5.92" (150mm)
DSA072CC080	4-1/2"	5.00" (127mm)	2.50" (64mm)	5.92" (150mm)

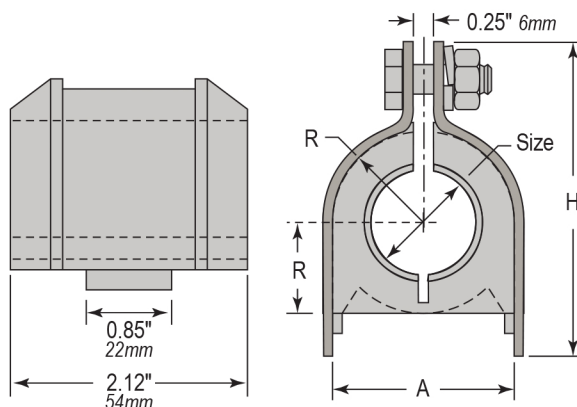

SUFFIX	Note: All clamps have Silicon Bronze Hardware		
	Clamp	Cushion	Example
Z	Plated Steel		DSA006CC018Z
S	Stainless Steel		DSA006CC018S
ZH	Plated Steel		DSA006CC018ZH
SH	Stainless Steel		DSA006CC018SH