## DSAW7401SH - DSAW7416SH

Slotted Indented Hex Machine Screw

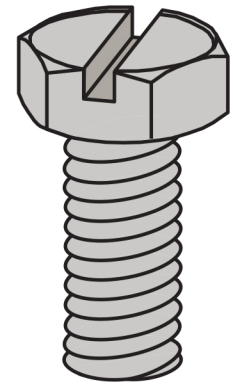

| Part No. | Size UNC | Length | Wt./C |
|---|---|---|---|
| DSAW7401 | 1/4" | 3/4" *(19mm)* | 1.3 *(0.5 Kg)* |
| DSAW7405 | 3/8" | 1-1/4" *(32mm)* | 5.3 *(2.4 Kg)* |
| DSAW7416 | 5/16" | 1" *(25mm)* | 4.1 *(1.8 Kg)* |

Threads are Unified American Coarse, UNC. Screw, nuts and bolts conform to ASTM A 307, SAE J429 and ASTM A563.

| Hardware Material Specifications | | |
|---|---|---|
| **Material** | **ASTM Designation** | **ASTM Description** |
| Bar Stock: Channel Nuts | A 36 | Merchant quality hot rolled carbon steel bars. |
| | A 29-03 | Steel bars, carbon, hot rolled special quality. |
| Bar Stock | A 569 | Merchant quality hot rolled carbon steel bars. |
| Hardware | A 563 | Carbon and alloy steel nuts. Carbon steel externally threaded standard fasteners. |
| | A 307 | |
| Wesanco Channel Nuts Stainless Steel | B783 | Sintered 316 - "Domestic Nut" |
| | A240 | Bar Stock 316 - "Import Nut" |
| Aluminum Nuts | B221 | Channel Nuts |

| Hardware Finish Specifications | | |
|---|---|---|
| **Finish** | **Finish Code** | **Description** |
| Electroplated | EG | Wesanco fittings and hardware supplied as "Electro-Galvanized" in accordance with ASTM B 633. |
| Mill-Galvanized (Pre-Galvanized) | PG | Galvanized steel used in the manufacture of Wesanco channel sections conforms to ASTM A 653 GR33 G90. Uncoated edges resulted from slitting, punching and channel cut off are present. |
| Hot Dip Galvanized After Fabrication (HDGAF) | HG | Wesanco channel and fittings which are hot dip galvanized after fabrication conform to one of the following specifications. ASTM A 123, ASTM A153 or ASTM A386. |
| Special Coatings | PL, GOLD | Other commercially available finishes can be supplied per specification when required to protect applications. |

| Project Information: | | Approval Stamp: |
|---|---|---|
| **Project:** | | |
| **Date:** | **Phone:** | |
| **Architect / Engineer:** | | |
| **Contractor:** | | |
| **Address:** | | |
| **Notes 1:** | | |